

Form PTO-1390 U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE
(Rev. 1-98)TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371Attorney's Docket Number
12911-1180U.S. Application No.
(if known, see 37 CFR 1.5)
09/600337International Application No.
PCT/FR99/02781International Filing Date
12.11.99 (Nov. 12, 1999)Priority Date Claimed
13.11.98 (Nov. 13, 1998)

Title of Invention

METHOD FOR AUTOMATICALLY PLACING PARTS ON LEATHER PIECES WITH NO-HOMOGENEOUS CHARACTERISTICS

Applicant(s) for DO/EO/US

CHABIRAND GARÇONNET, Didier; VALLORTIGARA, Alain

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).


Items 11. to 16. below concern document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
- ☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information: copy of Translation Certificate

Express Mail Label No. EL561433162US

Date: July 13, 2000

Page 1 of 2

U.S. Application No. (if known) 09/600337 (37 CFR 1.5) International Application No. PCT/FR99/02781		Attorney's Docket Number 12911-1180	
17. <input checked="" type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO.....\$970.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO.....\$840.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO.....\$760.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4).....\$670.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4).....\$96.00 ENTER APPROPRIATE BASIC FEE AMOUNT =		<u>CALCULATIONS PTO USE ONLY</u>	
		\$ 840	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).		\$ --	
Claims	Number Filed	Number Extra	Rate
Total claims	18 - 20 =	--	x 18.00
Independent Claims	1 - 3 =	--	x 78.00
Multiple Dependent Claims (if applicable)		+ 260.00	\$ --
TOTAL OF ABOVE CALCULATIONS =		\$ 840	
Reduction of 1/2 for filing by small entity, if applicable. A Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).		-	\$
SUBTOTAL =		\$ 840	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).		\$	
TOTAL NATIONAL FEE =		\$ 840	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property		\$ 40	
TOTAL FEES ENCLOSED =		\$ 880	
		Amount to be refunded:	\$
		charged:	\$
a. <input checked="" type="checkbox"/> A check in the amount of \$880 to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. 10-1215 in the amount of \$_____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment, to Deposit Account No. 10-1215. A duplicate copy of this sheet is enclosed.			
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.			
SEND ALL CORRESPONDENCE TO: Roger T. Frost, Esq. JONES & ASKEW, LLP 2400 Monarch Tower, 3424 Peachtree Road, N.E. Atlanta, Georgia 30326 Telephone: 404-949-2400			
 Roger T. Frost, Reg. No. 22,176			
FORM PTO-1390 (Rev. 1-98) adapted		Page 2 of 2	

09/600337

534 Rec'd PCT/PTO 13 JUL 2000 PATENTS

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

DIDIER CHABIRAND GARCONNET, ET AL.

Serial No. _____

Filed: **CONCURRENTLY HEREWITH**
(National Phase of PCT/FR99/02781
filed November 12, 1999)

For: **METHOD FOR AUTOMATICALLY
PLACING PARTS ON LEATHER PIECES
WITH NON-HOMOGENEOUS CHARACTER-
ISTICS**

)
) ATTEN: DO/EO/US
)

) Art Unit: To Be Assigned
)

) Examiner: To Be Assigned
)
)
)

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, DC 20231
Sir:

Please enter the following amendments to the national-phase patent application identified above, before calculating the total amount of filing fee for that application.

In the Claims

Claim 4, line 1, cancel "any one of claims 1 to 3" and substitute --claim 1--.

Claim 6, line 1, cancel "or 5".

Claim 7, line 1, cancel "or 5".

Claim 8, line 1, cancel "any one of claims 1 to 7" and substitute --claim 1--.

Claim 10, line 1, cancel "any one of claims 1 to 9" and substitute --claim 1--.

Claim 12, line 1, cancel "any one of claims 1 to 11" and substitute --claim 1--.

Claim 14, line 1, cancel "any one of claims 1 to 15" and substitute --claim 1--.

Claim 15, line 1, cancel "any one of claims 1 to 14" and substitute --claim 1--.

Claim 17, line 1, cancel "any one of claims 1 to 16" and substitute --claim 1--.


EXPRESS MAIL LABEL NO. EL561433162US
Date: July 13, 2000

REMARKS

The foregoing amendments remove all multiple dependencies from the claims, including certain dependencies that may have been indefinite according to U.S. practice. These amendments thus place all claims in condition for examination on the merits, and avoid the need to pay the surcharge for submitting a multiple-dependent claim.

The applicants request entry of this amendment and await examination in due course.

Respectfully submitted,


Roger T. Frost
Reg. No. 22,176

JONES & ASKEW, LLP
2400 Monarch Tower
3424 Peachtree Road, N.E.
Atlanta, Georgia 30326
(404) 949-2400
J&A Docket: 12911-1180

09/600337

534 Rec'd PCT/PTC 13 JUL 2000

APPLICANT: CHABIRAND GARCONNET Didier and VALLORTIGARA Alain

TITLE: METHOD FOR AUTOMATICALLY PLACING PARTS ON LEATHER PIECES WITH NON-HOMOGENEOUS CHARACTERISTICS

U.S. COMPLETION OF

INTERNATIONAL APPLICATION PCT/FR99/02781

FILED 12 NOVEMBER 1999

VERIFICATION OF A TRANSLATION

I, (name and address of translator) Marie-Claude NIEPS of 158, rue de
l'Université, 75007 PARIS - FRANCE hereby declare that:

My name and post office address are as stated above:

That I am knowledgeable in the English Language and the French Language and
that I believe the English translation of the specification, claims, and abstract relating to
International Application PCT/FR99/02781
filed 12 NOVEMBER 1999 is a true and complete translation.

I hereby declare that all statements made herein of my own knowledge are true
and that all statements made on information and belief are believed to be true, and
further that these statements were made with the knowledge that willful false
statements and the like so made are punishable by fine or imprisonment, or both, under
Section 1001 of Title 18 of the United States Code and that such willful false
statements may jeopardize the validity of the application or any patent issued thereon.

(signature of translator)

Date  JUNE 30, 2000

METHOD FOR AUTOMATICALLY PLACING PARTS ON LEATHER PIECES WITH NON-HOMOGENEOUS CHARACTERISTICS

Field of the invention

5 The invention relates to automatically laying out pieces to be cut out from remnants (i.e. short lengths) of flexible material with characteristics that are not uniform, in particular natural leathers or hides.

10 The field of application of the invention is the field of manufacturing articles, in particular made of leather or fur, and requiring pieces cut out from such remnants to be assembled together. The industries manufacturing the following articles are particularly concerned: furniture, upholstery, in particular
15 automobile upholstery, leather goods, bags, shoes, and clothing.

Background of the invention

20 For reasons of aesthetic appearance and of quality, in order to make the various portions of an article, it is necessary to choose pieces of appearance that is similar to degrees that vary, in particular as a function of their proximity and of their locations in the article.

25 For example, for leather, and in particular for a leather sofa, a high degree of similitude in appearance is sought between the pieces forming each seat back, between the pieces forming each seat cushion, between the seat backs, between the seat cushions, and between each seat back and each corresponding lumbar support cushion.
30 However, a lower degree of similitude can be accepted between seat backs and seat cushions, between armrests and seat backs, and between armrests and seat cushions. A lower degree of similitude is also acceptable for the pieces serving to trim the structure of the sofa, both
35 between said pieces, and between them and the other pieces.

Unfortunately, leathers, and in particular natural leathers, are not uniform in appearance and quality. That applies not only to different hides, even when they come from the same batch, but also to any one hide.

- 5 Variations in color shade, grain size, and leather quality can be observed between different zones of the same hide, and, within any one zone, the appearance can vary, e.g. between matt and glossy, depending on the angular position of the hide relative to an observer.
- 10 That applies regardless of the origin of the leather.

- For natural leathers, the layout of the component pieces of an article must therefore satisfy certain constraints. In addition, any flaws must be taken into account. Depending on their seriousness, such flaws can
- 15 preclude the use of certain zones of the leather, or restrict such use to pieces which can accept such flaws, e.g. because of their locations in the final article. To a lesser degree, such a requirement to satisfy
- 20 constraints also exists for leathers that are not totally natural, e.g. pigmented leathers which are of uniform color, or corrected leathers or flesh splits that have been embossed to give a grain effect, after buffing or splitting.

- Currently, and in particular for laying out pieces
- 25 for high-quality articles of furniture or upholstery, the task is entrusted to the know-how of an operator capable of ensuring that all of the constraints are satisfied.

- It is desirable to have a method making it possible to perform such laying out automatically, so as to avoid
- 30 the need for laying out to be performed by an operator, and so as to optimize layouts better in order to waste as little as possible of a costly raw material.

Proposals have been made to automate laying out on leathers.

- 35 German Patent DE 195 21 514 describes a method comprising digitizing the outlines of the hides and detecting flaws organized into various categories with

which different colors are associated. Laying out is performed either by an operator on the basis of an image showing the outline of the hide and the colored flawed zones, or else automatically by implementing suitable
 5 software.

A similar method is described in United States Patent US 5 258 917, the layout taking account of a possible additional constraint, namely the desirable proximity on a hide of portions of outlines of different
 10 pieces.

Object and summary of the invention

An object of the invention is to provide a method making it possible for pieces that are to be cut out from
 15 leathers, hides, and more generally from remnants of flexible material having non-uniform characteristics, to be laid out automatically while also taking account of the various constraints on the pieces in order to make articles that satisfy particular quality and aesthetic
 20 appearance requirements.

According to the invention, a method of automatically laying out pieces to be cut out from remnants of flexible material having non-uniform characteristics, and to be used for making articles,
 25 comprises the steps consisting in:

establishing, for remnants of a determined type, at least one mask whose area is subdivided into various zones which correspond to different value levels of a characteristic of the material of the remnant;

30 assigning a set of constraints to at least some of the component pieces of a determined type of article, which set of constraints includes at least one value constraint for a characteristic of the material of the remnant;

35 defining links between at least some of the component pieces, which links have different levels as a

function in particular of relationships imposed between constraints assigned to the pieces;

digitizing each remnant in order to obtain an image;

applying to the image of each remnant the mask or
5 each mask corresponding to the type of the remnant by performing dimension matching so as to subdivide the image of the remnant into various zones having uniform characteristics; and

laying out automatically by disposing the pieces in
10 the zones of the image of the remnant as a function of any constraints assigned to the pieces, and in compliance with the links defined between the pieces.

Thus, the invention is remarkable firstly in that masks are used which make it possible to define zones of
15 uniform characteristics on the remnants, and secondly in that constraints are assigned and links are defined between the pieces, which constraints and links determine the layout.

Advantageously, a reference axis is associated with
20 each mask and with each remnant, at least one mask is defined per type of remnant, such as a mask comprising zones having different values for the color shade of the material and/or a mask comprising zones having different values for a surface appearance characteristic of the
25 material, the reference axis is defined manually or automatically on each remnant, and each corresponding mask is applied to the image of each remnant by superposing every time the reference axes of the remnant and of the mask.

30 When leather is used, the reference axis associated with each mask and with each remnant or hide is typically the axis corresponding to the backbone of an animal. For each type of hide, at least one mask is defined comprising zones having different values for the grain of
35 the leather and/or a mask is defined comprising zones having different values for the color shade of the leather.

For a type of remnant, it is also possible to define a maximum percentage by which the material can stretch in predetermined directions, e.g. parallel to and perpendicular to the reference axis, in each uniform zone. The term "remnants of a determined type" is used herein to mean remnants of similar origin, e.g., for leather, hides coming from the same type of animal.

Advantageously, at least some of the component pieces of an article are distributed into groups, each of which comprises one or more pieces. For example, a group comprises the pieces necessary for making a single functional sub-assembly of the article. In each group, the pieces may optionally be linked together by same-level links.

At least some pieces or groups of pieces are assigned one or more constraints chosen in particular from a surface appearance characteristic value, a color shade, and a preferential angular position on the remnant relative to a reference axis of the remnant. It is also possible to associate therewith an indication of the angular positioning tolerance on either side of the preferential angular position. The level of link between two pieces is a function of the looked-for degree of similitude between any constraints assigned to the pieces, and of any location proximity imposed.

Preferably, at least some pieces or some group(s) of pieces are assigned respective degrees of layout priority, so that the laying out process starts with the pieces of the highest degree of priority.

In yet another particularity of the method, the process of digitizing each remnant comprises storing the locations and the degrees of seriousness of any flaws detected on the remnant. Detecting the locations of the flaws and assigning the degrees of seriousness may be performed by visual inspection.

Brief description of the drawings

The invention will be better understood on reading the following description given by way of non-limiting example with reference to the accompanying drawings, in
5 which:

Figure 1 is a flow chart showing various steps of an implementation of a particular method of the invention;

Figures 2A and 2B show an example of how hide quality can vary in the longitudinal direction and in the
10 transverse direction;

Figures 3A to 3B show masks used for implementing the method shown in Figure 1;

Figures 4 and 5 show particular implementations of the grouping together of the pieces necessary for
15 manufacturing an article of leather which, in this example is a suite comprising a three-seater sofa, and two armchairs;

Figure 6 is a a very diagrammatic view of a digitization station for digitizing a particular hide;

Figure 7 shows the result of applying the masks of
20 Figures 2 and 3 to the image of a digitized hide;

Figure 8 is a flow chart showing how automatic laying out takes place for making the article shown in Figures 4 and 5; and

25 Figures 9 to 12 show the result of the pieces of Figures 4 and 5 being laid out on 4 hides, by implementing the laying out process shown in Figure 8.

Description of preferred implementations

30 In the description below, consideration is given to laying out pieces on hides for making articles of leather. However, the invention is applicable to laying out pieces on remnants of flexible materials other than leather, e.g. on natural hides, which also have non-
35 uniform characteristics such as non-uniform surface appearance characteristics (unevenness, roughness, veining, etc.) and/or non-uniform color characteristics.

Reference is made firstly to Figure 1 which shows the steps making up a particular implementation of a method of the invention, and then a description is given of an example of how it can be used in manufacturing particular leather articles.

In a first characteristic of the method, one or more masks are established (step 10) for a determined type of hide, or for a plurality of determined types of hide that can be used when implementing the method.

The various types of hide are, in particular, those commonly used in the leather industry. They correspond to various types of animal.

Each masks reflects how a characteristic of the corresponding hide is distributed in various zones: variation of leather grain, and variation of leather color shade. It may also show a reference axis, typically corresponding to the location of the backbone of the animal. The zones of a mask are defined so that the characteristic in question is substantially uniform within any one zone, with at least two value levels being associated with each characteristic. The borders between the zones of a mask may be defined loosely, i.e., for example, by associating each line of separation between two adjacent zones with overshoot tolerance data indicating the tolerance for overshooting the border in either direction. The variations of the characteristics in question on a hide are progressive rather than sudden: they satisfy a variation gradient.

By way of example of the variation of a characteristic of a hide, Figures 2A and 2B very diagrammatically show the variation in the quality of a hide respectively between the rear and the front (substantially along the backbone) and between one side and the backbone. In this example, the quality is associated with the size and the uniformness of the grains of the leather.

Figure 2A shows a high variation in the quality at the rear of the hide (over about 10% of the total length, from a minimum ~~value~~ corresponding to about 30% of the maximum value observed at the center of the hide, to said maximum value. The maximum quality is observed over about 65% of the length, in the central portion of the hide. At the front, the quality decreases (due to the folds of the neck) with a variation that is less sudden than at the rear, over a distance corresponding to about 25% of the length. Figure 2B shows a high variation in quality from the side to a distance corresponding to about 20% of the half-width, from about 30% of the maximum quality to said maximum quality.

Naturally, Figures 2A and 2B concern a particular type of hide. The variation gradients can be significantly different for other types of hide.

The mask(s) associated with each type of hide are stored (step 12). It is also possible to associate therewith data indicating, for each type of hide, an acceptable stretch percentage by which it is acceptable for the leather to be stretched in at least two directions, such as the direction of the reference axis, and the direction normal thereto. This stretch capacity may be taken into account when subsequently performing laying out on this type of hide.

For making an article of a determined type, comprising an assembly of pieces of leather of predetermined dimensions and shapes, the method may include a step (14) in which the pieces making up the article are grouped together. The grouping together is preferably performed by gathering together in the same group those pieces which are necessary for making a single functional sub-assembly of the article (e.g. a seat back of an armchair). In such a case, the pieces of a group are to be assembled together and they have common outline portions, and so, at least in certain cases, the group of pieces can be considered to be a single piece.

This applies particularly when the pieces making up a sub-assembly must have appearance characteristics that are uniform, for aesthetic reasons, and must be placed side-by-side in a uniform zone of a hide. The pieces of the group are then linked together by links of the highest level. It should be noted that the term "article of a determined type" is used to designate both a particular article, e.g. an armchair, and also a batch of articles normally made in the form of a suite, e.g. a sofa and matching armchairs. It should also be noted that information may be associated with each group, indicating whether the links between the pieces of the group may be broken or not. When it is positive, this information makes it possible to impart greater flexibility during the subsequent laying out step.

The following step (16) of the method consists in assigning one or more constraints to at least some of the pieces making up the article. These constraints are determined by the location of the piece in the article and by the resulting aesthetic considerations. The constraints are chosen in particular from the leather grain value, the color shade value, and the angular position of the piece on the hide. As regards said angular position, differences in appearance can occur depending on whether a piece is cut out while angularly positioned in one direction or another relative to a reference axis of the hide. The characteristic relating to the angular position of the piece on the hide may be associated with angular position tolerance data indicating the maximum angular tolerance authorized for the position of the piece on either side of the specified angular position. Other data useful to laying out may also be associated, e.g. the level of seriousness of leather flaws that is tolerated for each piece.

In another characteristic of the laying out method of the invention, said method includes a step (18) for establishing links between pieces or, when groups of

pieces are formed, also between pieces and groups of pieces, or between groups of pieces. The links are organized into a plurality of levels, from the highest to the lowest. At least one component of the link consists of the degree of similitude or of non-similitude between the constraints assigned to the pieces. Another component may consist in the desired proximity between the pieces on the hide, in particular so that they have characteristics that are as close as possible or because they have common outline portions. Thus, the strongest link exists between pieces having the same levels of characteristics (grain size, color shade, angular position) and further assigned a proximity constraint. The proximity constraint between two pieces can be expressed in the form of a maximum distance over the hide between two characteristic points of the two pieces, but also in the form of a maximum difference in grain and/or color value. Pieces linked in this way may belong to the same group. The weakest link exists between pieces not having any characteristic similitude or non-similitude requirement or any proximity constraint, e.g. isolated pieces or pieces that are situated in locations of the article to be made that are normally not exposed or visible.

Another step (20) of the method may consists in assigning a degree of layout priority to at least some of the pieces, or, when groups have been constituted, to one or more groups. More than two priority degree values may be provided. During laying out, the pieces or groups of pieces having the highest priority are laid out first. Preferably they are the pieces or groups of pieces to which the highest constraints are assigned, and those which are linked by the highest level of links, so that the corresponding uniform zones of the or of each hide used are occupied preferentially by these pieces. Decreasing degrees of priority may then be assigned to

the remaining pieces of groups of pieces depending on the levels of the links that are assigned to them.

During step 22, any grouping of the pieces, the constraints assigned to the pieces or groups of pieces, and the defined links are stored. This information, in the form of a file of linked constraint pieces, can be used to make a series of articles of the corresponding type.

For making a determined type of article from hides of a determined type, a first operation (step 24) consists in digitizing one or more hides of this type, and, for each hide, in recording the digitized image as well as information about the locations and seriousness of flaws detected on the hide. A reference axis typically corresponding to the backbone of the animal is preferably determined on each hide, so that the digitized image of the hide includes information identifying the location of the reference axis. The locations of the flaws can be indicated manually on the hide and their degrees of seriousness evaluated and input by an operator. In a variant, it is possible to locate the flaws and to rank their levels of seriousness by automatically analyzing the digitized image. The position of the reference axis may be determined by indicating or marking it manually on the hide. In a variant, it is possible to locate the reference axis by automatically analyzing the digitized hide.

The following step (26) consists in searching for the stored mask(s) corresponding to the type of hide used. Optionally, an operator may be able to modify the mask or each mask when the hide or the batch of hides used has a characteristic whose value distribution over the leather differs significantly from the value distribution usually encountered for this type of hide, and taken as a reference for forming the mask corresponding to this characteristic.

Then, the mask(s), as optionally modified, are applied to the image of the or of each digitized hide (step 28) so that the surface of the hide is subdivided into uniform zones. Applying a mask includes size
 5 matching, e.g. by scaling up or down to cause the mask to coincide as well as possible with the image of the hide.

The file of linked constraint pieces corresponding to the type of article to be made is read from the pre-recorded files (step 30).

10 Then the automatic laying out process (step 32) is performed. This consists firstly in laying out the pieces or groups of pieces having the highest priority level, on the basis of ordering criteria predefined by the user, then in laying out the following pieces or
 15 groups of pieces in decreasing order of priority. For each new piece or each new group of pieces to be laid out, the link(s) existing with a piece or a group of pieces which have already been laid out are examined so as to determine the location of the new piece or new
 20 group of pieces on the same hide or on another hide.

When flaws are detected on the hides used and stored, the layout takes into account the seriousness and the locations of the flaws. A portion of surface having a flaw is used or is not used for a piece depending on
 25 whether or not the degree of seriousness of the flaw is not more than the degree of seriousness tolerated for said piece, based on the information stored for this purpose with reference to the piece.

In any event, the desired layout is the layout for
 30 which the surface(s) of the hide(s) used is occupied optimally to minimize material wastage, in particular by making use of the stretching capacities of the leather, and of the possibilities of rotating the pieces relative to their preferential angular positions. Account is also
 35 taken of any border overshoot tolerances between zones having uniform characteristics on the hide. Known means for this purpose consist in using a program to simulate

as high a number as possible of variant layouts and in choosing the most favorable. The stored stretching capacities of the leather, indicating the extent to which it can be stretched in the direction of the reference axis or in the direction perpendicular thereto, and the border overshoot tolerances between zones of the hide may be used during layout simulations, not necessarily systematically, but, where applicable, when an available location is of size only very slightly smaller than the size of a piece to be laid out. Once the optimal layout has been determined, it is stored (step 34) so as to be used during a subsequent cutting-out operation, or, as a basis, during future laying out for a similar article.

15 Example of use

This example concerns the laying out, in leathers from cow hides, of the pieces required to make an article constituted by a three-seater sofa and by two armchairs.

Figures 3A and 3B show models of masks that can be applied to cow hides.

The mask 40 of Figure 3A is a color shade mask distinguishing between two levels of color shade of the leather, namely light and dark. On the mask 40, the axis A corresponding to the axis of the backbone is shown, as are the neck portion 42, the tail portion 44, and the leg portions 46 of the animal. The following zones are distinguished: light color zones ZN1 and ZN4 on the flanks and the legs, light color zones ZN2 and ZN3 on either side of the axis A going from the middle of the backbone to the neck, and dark color zones ZN5 and ZN6 on either side of the axis A going from the middle of the backbone to the tail.

The borders between the various color shade zones ZN1 to ZN6 are shown by straight line segments. However, the shade variation is progressive. The mask 40 may be associated with distance data D1 representing the border

overshoot tolerance on either side said border, as shown between the zones ZN1 and ZN2.

The mask 50 of Figure 3B is a grain size mask distinguishing between two levels of grain size of the leather, namely fine grain and coarse grain. This mask also shows the axis A corresponding to the backbone of the animal, and the neck portion 52, the tail portion 54, and the leg portions 56 of the animal. The following zones are distinguished: two fine grain zones ZG1, ZG2 occupying the central portion of the hide on either side of the axis A, coarse-grain zones ZG3, ZG4, each of which occupies a respective flank and the associated legs, and coarse grain zones ZG5, ZG6, ZG7, and ZG8 occupying the portions in the vicinity of the neck and of the tail, on either side of the axis A.

It is possible to associate the mask 50 with data representing the maximum stretching percentages by which the leather can stretch in the directions X and Y respectively parallel to and perpendicular to the axis A.

The masks 40 and 50 are of the same shape and size. They are stored, together with any associated data representing the stretching capacities of the leather, in order to be applied to all cow leathers.

It is immediately apparent that, using the same principle, masks can be formed that are applicable to hides of some other animal origin.

Figure 4 diagrammatically shows a set of pieces of leather used for manufacturing a three-seater sofa 3, and Figure 5 diagrammatically shows a set of pieces used for manufacturing a matching armchair.

In Figure 4, certain component pieces are distributed into groups. A plurality of groups, each made up of a plurality of pieces, serve to make up respective functional sub-assemblies of the sofa. These groups are as follows: the "right seat back" group G1, and the "left seat back" group G3, each of which comprises 4 pieces, the "center seat back" group G2

comprising 3 pieces, the "right seat cushion" group G4, the "center seat cushion" group G5, and the "left seat cushion" group G6, each of which comprises 2 pieces, and the "structure" group G7 which comprises pieces (numbered
 5 1 to 11) serving to trim the structure of the sofa. Other pieces individually constitute respective functional groups, G8, G9, and G10 for the "right lumbar support cushion", the "center lumbar support cushion", and the "left lumbar support cushion", and G11 and G12
 10 for the "right armrest" and the "left armrest". The remaining pieces comprise pairs of linked parts I, II, and III.

The various pieces are linked together by links which, in this example are of four possible levels 1,
 15 2/2', 3, and 4, in order of decreasing strength.

The level-1 links are between pieces between which there is a high constraint similitude requirement and a layout proximity constraint. They are the pieces in each of the functional sub-assemblies corresponding to the
 20 groups G1 to G6. The pieces making up a seat back or a seat cushion must have the same leather color shades, the same leather grain size, and the same angular positions on the leather, and they must also be laid out in proximity with one another. This proximity constraint is
 25 expressed by a maximum distance between characteristic points on the pieces, such as, for example, between the points p_1 and p_2 of the pieces P_1 and P_2 of the right seat back. this proximity constraint can be explained by the fact that the pieces must, for aesthetic reasons, have
 30 the highest possible similitude in appearance in addition to the same levels of shade and grain characteristics and the same angular position. In addition, since the pieces are to be assembled together, they have common outline portions, and it is thus advantageous for them to be laid
 35 out side-by-side.

The level-2 links are between pieces or groups of pieces that have the highest constraint similitude

requirement between them (same shade, grain, and angular position), but without having a location proximity constraint. In this example, these links are the links between seat backs and associated lumbar support
 5 cushions.

The level-2' links are between pieces or groups of pieces that have constraint similitude and non-similitude relationships between them, e.g. same grain, same angular position, but opposite shades. In this example, these
 10 links are the links between center seat back and right seat back, between center seat back and left seat back, between center seat cushion and right seat cushion, and between center seat cushion and left seat cushion, so that the color shade varies in the sofa. Naturally, if
 15 such a variation were not desired, level-2 links would be adopted between these groups.

The level-3 links are between the pieces or groups of pieces that have a minimal constraint similitude or non-similitude requirement, e.g. same grain or same
 20 shade. In this example, these are the links between seat back and associated armrest, and between seat cushion and associated armrest.

The level-4 links are in fact zero links, allowing full freedom of positioning as regards shade and grain, and also angular position and proximity. They concern
 25 the structure pieces, and the free pieces.

The various above-mentioned groups of pieces and pieces may also be assigned degrees of layout priority indicating in which order they should preferably be laid
 30 out.

In this example, it is possible to assign the highest priority 1 to each of the functional groups G1 to G6 that comprise all of the pieces to which level-1 links are assigned, and then to assign a level-2 priority to
 35 the groups G8 to G10 in which level-2 links are assigned to the pieces, to assign a level-3 priority to the groups G11 and G12 whose pieces are assigned level-3 links, and

to assign the lowest priority level 4 to the other pieces and groups of pieces.

Each piece or group of pieces to which an angular position constraint is assigned is associated with
 5 angular position tolerance information in the form of a maximum allowable angle of rotation (or angular offset) relative to the specified angular position. In most cases, the specified angular position is defined relative to the reference axis corresponding to the backbone.
 10 Angular positioning of the pieces such that their longest dimensions are perpendicular to or parallel to the reference axis is generally specified.

Each piece is also associated with flaw tolerance information indicating the degree of seriousness of the
 15 flaw on the leather that is tolerated for the piece.

In a manner similar to Figure 4, Figure 5 shows how certain component pieces of an armchair F are distributed in functional groups, namely a "seat back" group G14 comprising 5 pieces, a "seat cushion" group G15
 20 comprising 2 pieces, and a "structure" group G16 comprising a plurality of pieces (numbered 12 to 20). Other pieces individually constitute functional groups: G17, G18, and G19 for the "lumbar support cushion", the "right armrest", and the "left armrest". The remaining
 25 pieces comprise two linked pieces IV.

In each group G14 and G15, the pieces are linked together by level-1 links. Group G14 and group G17 are linked together by a level-2 link. Groups G14 and G18, G14 and G19, G15 and G18, and G15 and G19 are linked
 30 together by level-3 links. The other pieces are linked together by level-4 links (no constraints).

Degrees of layout priority from 1 to 4 are assigned respectively to the groups G14 & G15, to group G17, to groups G18 & G19, and then to group G16 and the remaining
 35 pieces. When the pieces making up a sofa and one or more matching armchairs are to be placed in the layout, for groups having the same priority, it is possible to start

with those of the sofa, followed by those of the armchair(s).

As in the case of the sofa shown in Figure 4, each piece or group of pieces is associated with angular position tolerance information, and with leather flaw tolerance information.

Figure 5 also shows the similar distribution of the groups G14' to G19' and of the linked pieces V of the second armchair F' (the "structure" group G16' comprises pieces numbered 21 to 29).

The shapes of the pieces, the way in which they are grouped together, the constraints assigned to them, the links defined, and accessory information constitute a file of linked constraint pieces. Such a file, for a suite made up of a sofa and of two armchairs, is stored.

It is immediately apparent that the principles described with reference to Figures 4 and 5 can be applied to any type of article whose manufacture requires pieces of leather to be assembled together and/or assembled to other elements.

It is thus possible to have a bank of files of linked constraint pieces corresponding to various types of articles to be manufactured.

In the example considered of a 3-seater sofa with 2 matching armchairs, a plurality of cow hides are necessary.

The hides supplied preferably come from the same batch, and they are digitized with information being recorded relating to flaws detected on each hide, and relating to the reference axis (backbone) of each hide.

Figure 6 is a very diagrammatic view of a digitization installation of the type described in the Applicant's International Patent Application No. WO 95/29 046.

A hide 60 to be digitized is laid flat on a conveyor table 62. While the hide is lying on the table, an operator looks for flaws 65. The operator indicates the

existence of any flaws by means of pieces of string 64 that define their outlines, and indicates the seriousness of the flaws by means of elements 66 placed in the centers of the zones delimited by the pieces of string.

5 Depending on the seriousness of the flaws, the elements 66 may have different shapes and/or sizes. The operator may also place marks 68, 70 on the hide so as to indicate the configuration and the disposition of the hide during digitization, and so that they can be reproduced

10 faithfully during subsequent operations. The marks 70 are disposed along the backbone so as to indicate the position of the reference axis of the hide.

Digitization is performed by moving the conveyor table 62 under a gantry supporting two linear cameras 72 and 74 which, by means of respective mirrors 76, 28 scan

15 respective segments, each of which extends over about one half of the width of the digitization zone.

During a first stage, the hide is lit from below by means of a source 82. The cameras 72, 74 transmit

20 signals to a control unit to make it possible to establish graphics information representing the outline of the hide. During a second stage, the hide is displaced in the reverse direction under the gantry while it is lit by a source 84 situated above the hide. The

25 positions of the pieces of string 64 and marks 68, 70, and the shapes of the elements 66 are detected by the cameras 72, 74, and the corresponding signals are sent to the control unit for establishing flaw information (indicating the locations and the seriousness of the

30 detected flaws) and reference information indicating the configuration and disposition of the hide, in particular information relating to the reference axis.

Other known methods may be used for automatically digitizing hide outlines and for visually or

35 automatically detecting the reference axis, as well as flaws and the degree of seriousness of flaws.

After the necessary hides have been digitized, the masks 40, 50 are applied to the images of the hides, as delivered by the stored graphics information representing their outlines, by causing their reference axes to coincide with the axis A and by applying a geometrical transformation so as to match them to the real dimensions of the hide. Superposing the masks with the image of the hide by causing the reference axes to coincide makes it possible to apply the masks simply and accurately even when the hide is not complete. However, it remains possible to consider using an automatic process for applying the masks without the reference axis of the hide being previously located.

Applying the masks 40, 50 to the image of a digitized hide makes it possible to define thereon a set of zones having uniform characteristics, i.e. light or dark shades associated with fine grain or coarse grain. The result is shown in Figure 7. it should be noted that distinct adjacent zones having the same uniform characteristics are situated substantially symmetrically relative to the reference axis A. By providing zones that are distinct although they have the same characteristics on either side of the backbone, it is possible to simplify the automatic laying out operation for pieces that should not straddle the backbone. It should also be noted that the borders between zones can be defined loosely by combining the border overshoot tolerances associated with the masks.

Once the various hides to be used have been subdivided into uniform zones by applying the masks, the automatic laying out process can be performed. The operations performed are as follows (Figure 8):

As a function of the predefined ordering criteria, the first priority group is chosen (step 100). The following step (102) consists in laying out on the hide in question the pieces making up the group, while satisfying the constraints assigned to the pieces

intrinsically or in relation to other pieces of the same group (e.g. physical proximity). If all of the pieces of the group have been laid out (test 104), then a test (test 106) is run to determine whether the group being
 5 processed is the last group. If all of the pieces of the group have not been laid out, then a test (test 108) is run to determine whether breaking the links is authorized. If it is, the links are broken (step 110) and the process returns to step 102 after modifying the
 10 constraints, and therefore the link level for the group. If link breaking is not authorized, the information identifying the pieces of the group that have not been laid out is stored (step 112), together with the other information relating to the group, before going on to
 15 test 106.

If the group is not the last group (answer to test 106 is "no"), the process goes on to the following group which is linked to the preceding group, or which follows it as a function of the established ordering criteria
 20 (step 114), and the process returns to step 102.

If it is the last group, a test is run to determine whether pieces remain to be laid out (test 116). If so, then a hide change is made (step 118), and the process returns to step 102 by starting with the group having the
 25 highest priority level among all of the pieces that have not been laid out (step 120).

If there are no more pieces to be laid out, the resulting layout is stored (step 122), and its efficiency is measured (step 124). The entire process can then be
 30 re-iterated (step 126) a predetermined number of times or until the end of a predetermined period, the finally-chosen layout then being the layout offering the highest efficiency. The efficiency is measured, for example, by the total surface area of hide used. The smaller this
 35 area, the higher the efficiency.

The result of the automatic laying out as performed on 4 hides is shown in Figures 9 to 12.

On the first hide (Figure 9), the three groups of pieces G1, G2, and G3 representing the seat backs of the sofa have been laid out in compliance with the links 2' between the groups of pieces so as to obtain the desired shade variation with color continuity along the sofa. Three lumbar support pieces G8, G9, and G10 are placed relative to the associated seat backs in compliance with the links 2. On the first hide, some of the pieces of the group G7 (structure) are laid out in compliance with the order in which the pieces are to be assembled together. The pieces of groups G1, G2, G3, G7, G8, G9, and G10 are angularly positioned perpendicularly to the reference axis A. The remainder of the hide is used to lay out free pieces of the sofa or of the armchairs.

On the second hide (Figure 10), the three groups of pieces G4, G5, and G6 representing the seat cushions of the sofa are laid out in compliance the links 2' between the groups of pieces so as to obtain the desired shade variation in the same way as for the seat backs. The pieces G11, G12 representing the armrests are laid out in compliance with the links 3, i.e. in zones having the same color shade (dark) as the side seat backs. Some of the group G7 (sofa structure) is laid out in compliance with the order of the pieces as are some of each of the groups G16 and G16' (armchair structures) and the pairs of linked parts I and III. the pieces are angularly positioned substantially perpendicularly to the reference axis A. The remainder of the hide is used to lay out free pieces of the sofa or of the armchairs.

On the third hide (Figure 11), the following are laid out: a group G14 representing an armchair seat back by positioning one of the pieces in a symmetrical portion of the hide, a group G15 representing an armchair seat cushion, a group G17 representing an armchair lumbar support cushion, and a group G18 representing the right armrest of an armchair. The layout complies with the links of level 3 between the groups G14 and G15, G14 and

G17, and G15 and G18. Some of each of the groups G16 and G16' (armchair structures) is laid out in compliance with the order of the pieces, as are the pairs of linked pieces II and IV. The pieces are disposed substantially
 5 perpendicularly to the reference axis A. The remainder of the hide is used to lay out free pieces of the sofa or of the armchairs.

On the fourth hide (Figure 12) the following are laid out: two groups G14' and G15' representing an
 10 armchair seat back and an armchair seat cushion, three groups G18', G19, and G19' representing the two left armrests and a right armrest of the armchairs, a group G17' representing an armchair lumbar support cushion, and the linked pieces V. The layout complies with the level-
 15 3 links between the groups G14' and G18', and G14' and G19'. The remaining pieces of the groups G16, G16' representing the structures of the two armchairs and the remaining free pieces fill in some of the remaining area of the hide.

CLAIMS

1/ A method of automatically laying out pieces to be cut out from remnants of flexible material having non-uniform characteristics, and to be used for making articles, said method being characterized in that it comprises the steps consisting in:

establishing, for remnants of a determined type, at least one mask whose area is subdivided into various zones which correspond to different value levels of a characteristic of the material of the remnant;

assigning a set of constraints to at least some of the component pieces of a determined type of article, which set of constraints includes at least one value constraint for a characteristic of the material of the remnant;

defining links between at least some of the component pieces, which links have different levels as a function in particular of relationships imposed between constraints assigned to the pieces;

digitizing each remnant in order to obtain an image; applying to the image of each remnant the mask or each mask corresponding to the type of the remnant by performing dimension matching so as to subdivide the image of the remnant into various zones having uniform characteristics; and

laying out automatically by disposing the pieces in the zones of the image of the remnant as a function of any constraints assigned to the pieces, and in compliance with the links defined between the pieces.

2/ A method according to claim 1, characterized in that, for a remnant of a determined type, at least one mask is established chosen from:

a mask comprising zones having different values for the color shade of the material; and

a mask comprising zones having different values for a surface appearance characteristic of the material.

3/ A method according to claim 2 for automatically laying out pieces to be cut out from hides so as to be used to make articles of leather, said method being characterized in that a mask is established that comprises zones having different values for the grain of the leather.

4/ A method according to any one of claims 1 to 3, characterized in that a mask is applied to the image of a remnant by causing reference axes respectively associated with the mask and with the remnant to coincide.

5/ A method according to claim 4 for automatically laying out pieces to be cut out from hides so as to be used to make articles of leather, said method being characterized in that an axis corresponding to the backbone of the animal from which the hide is taken is used as the reference axis.

6/ A method according to claim 4 or 5, characterized in that the reference axis is determined by indicating or marking it manually on the remnant.

7/ A method according to claim 4 or 5, characterized in that the reference axis is determined by analyzing the image of the digitized remnant.

8/ A method according to any one of claims 1 to 7, characterized in that at least some of the component pieces of a determined type of article are distributed into groups, and any links between the groups and between groups and pieces are defined.

9/ A method according to claim 8, characterized in that at least some pieces are distributed into functional groups, each of which comprises the component pieces(s) of a sub-assembly of the article.

10/ A method according to any one of claims 1 to 9, characterized in that at least some pieces are assigned one or more constraints chosen from:

- 5 a value level for the color shade of the material;
- a value level for a surface state characteristic of the material; and
- a preferential angular position relative to a reference axis of the remnant.

10

11/ A method according to claim 10, characterized in that at least some pieces are assigned a preferential angular position constraint relative to a reference axis of the remnant, and are associated with angular position

15 tolerance data corresponding to a maximum allowed angle of rotation relative to the preferential angular position.

12/ A method according to any one of claims 1 to 11,

20 characterized in that links are defined between at least some pieces, which links have different levels as a function of proximity constraints assigned to the pieces.

13/ A method according to claim 12, characterized in that

25 the proximity constraints between two pieces are expressed in the form of a maximum distance between two characteristic points on the pieces, or in the form of a maximum difference between values levels of one or more characteristics of the material of the remnant.

30

14/ A method according to any one of claims 1 to 13, characterized in that, for a remnant of a determined type, a possible coefficient of stretching of the material in at least one determined direction relative to

35 a reference axis of the remnant is defined, and the layout is defined by optionally using the defined stretching capacity.

15/ A method according to any one of claims 1 to 14,
characterized in that at least some pieces or groups of
pieces are assigned respective layout priority levels,
5 and the laying out is performed in order of decreasing
priority.

16/ A method according to claim 15, characterized in
that, the higher the level of link between a piece or a
10 group of pieces and another piece or group, the higher
the priority level assigned to the piece or group of
pieces.

17/ A method according to any one of claims 1 to 16,
15 characterized in that any flaws on each remnant are
detected, and each detected flaw is associated with data
representing one of a plurality of predetermined degrees
of seriousness, and flaw information is stored comprising
data indicating the locations of the flaws on the remnant
20 and the associated data indicating the levels of
seriousness.

18/ A method according to claim 17, characterized in that
each of the component pieces of a determined type of
25 article is associated with information representing the
degree of flaw seriousness tolerated by said piece.

A B S T R A C T

5

For remnants of a determined type, e.g. hides, at least one mask is established whose area is subdivided into various zones which correspond to different value levels of a characteristic of the material of the remnant, e.g. the color and the grain of the leather. A set of constraints is assigned to component pieces of a determined type of article, which set of constraints includes at least one value constraint for a characteristic of the material of the remnant, and links are defined between some of the component pieces, which links have different levels as a function in particular of relationships imposed between constraints assigned to the pieces. The digitized image of each remnant has applied to it the mask or each mask corresponding to the type of the remnant so as to subdivide the image of the remnant into various zones having uniform characteristics; and laying out is performed automatically by disposing the pieces in the zones of the image of the remnant as a function of any constraints assigned to the pieces, and in compliance with the links defined between the pieces.

30

Translation of the title and the abstract as they were when originally filed by the Applicant. No account has been taken of any changes that may have been made subsequently by the PCT Authorities acting ex officio, e.g. under PCT Rules 37.2, 38.2, and/or 48.3.

35

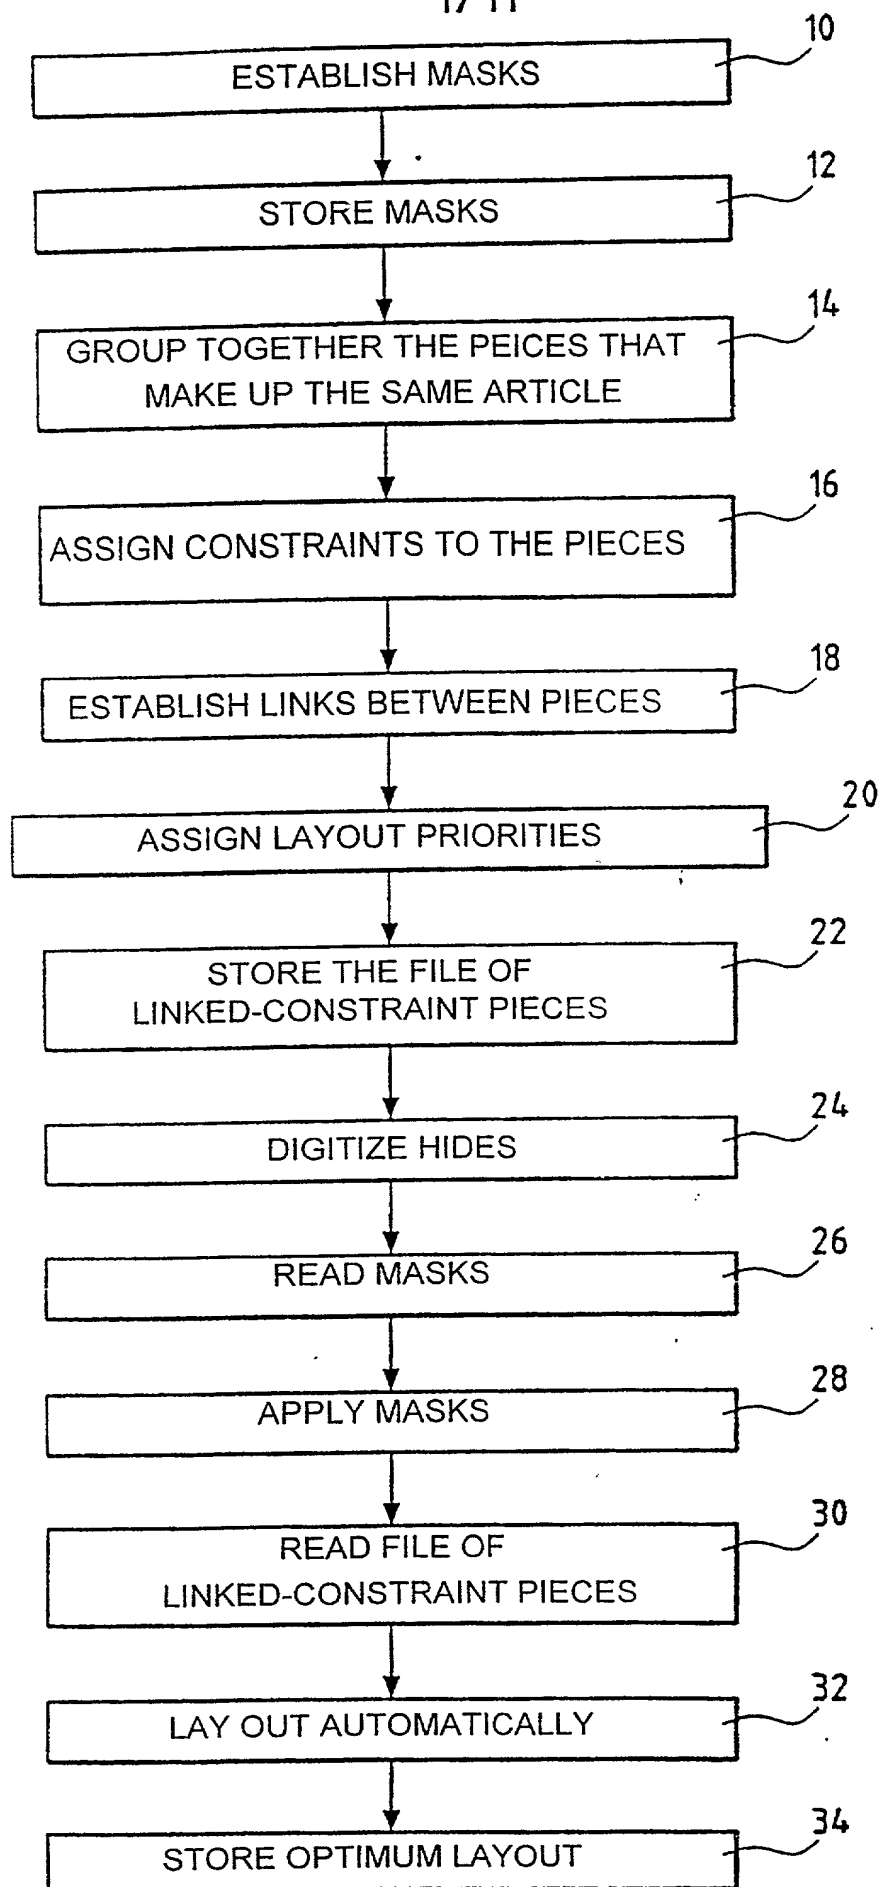


FIG.1

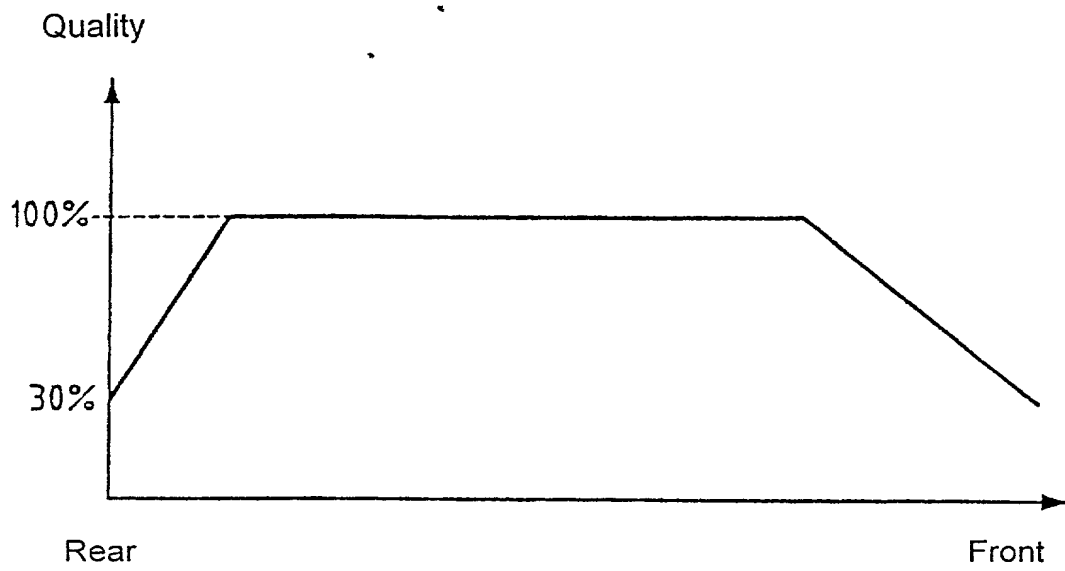


FIG.2A



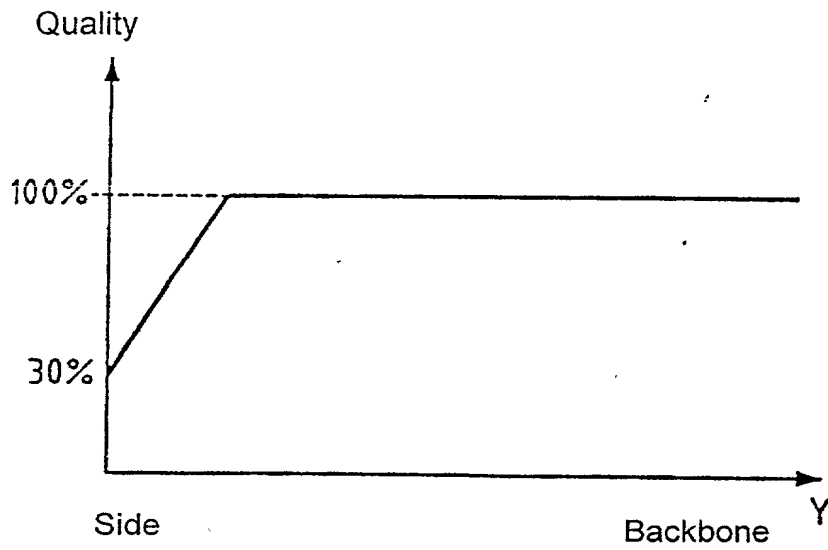


FIG.2B

3/11

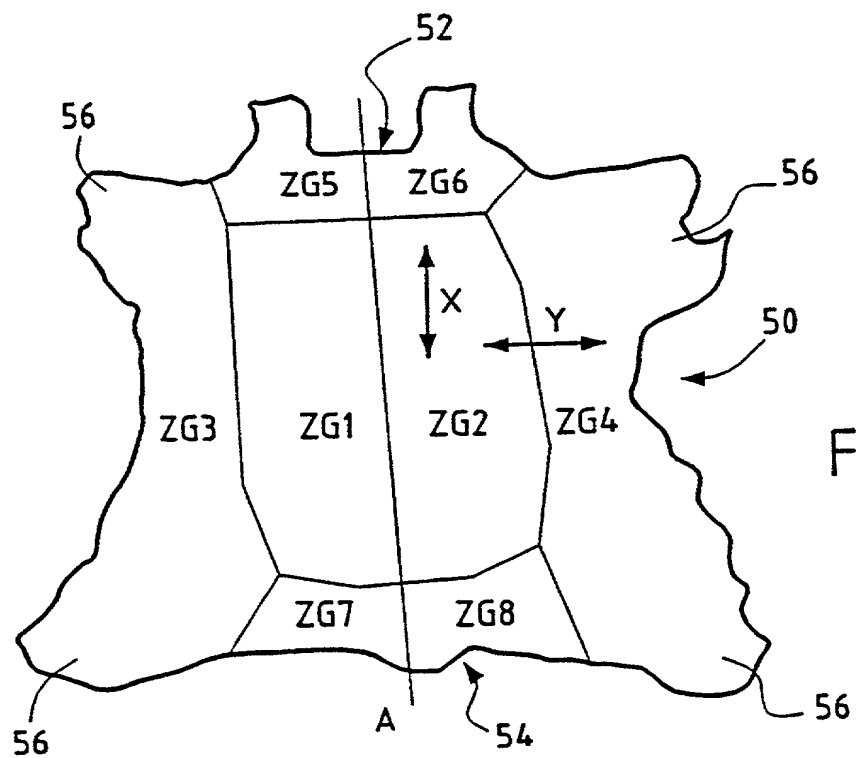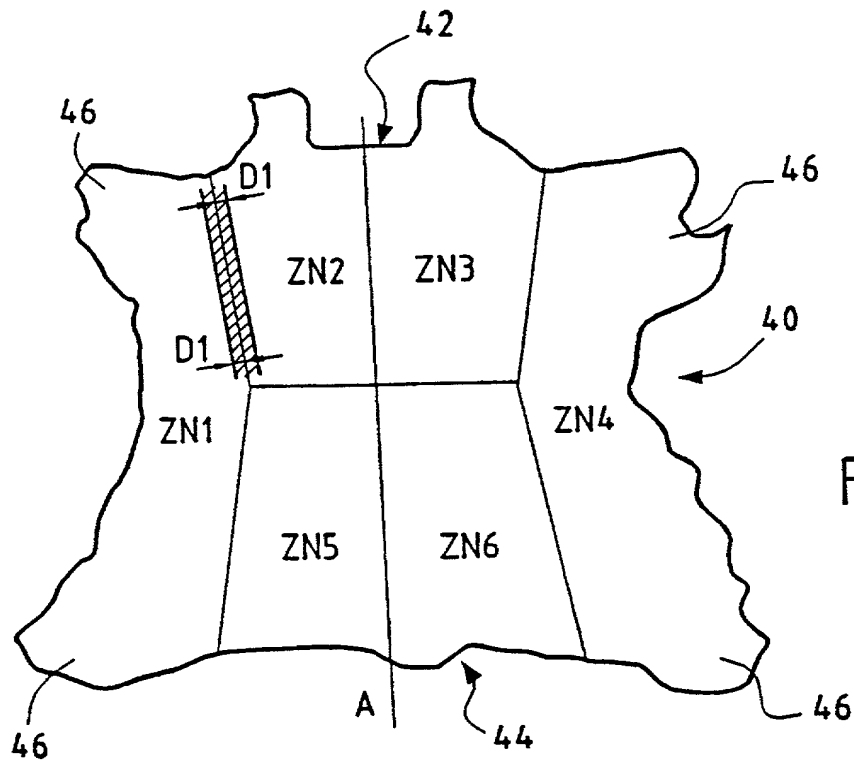

4/11

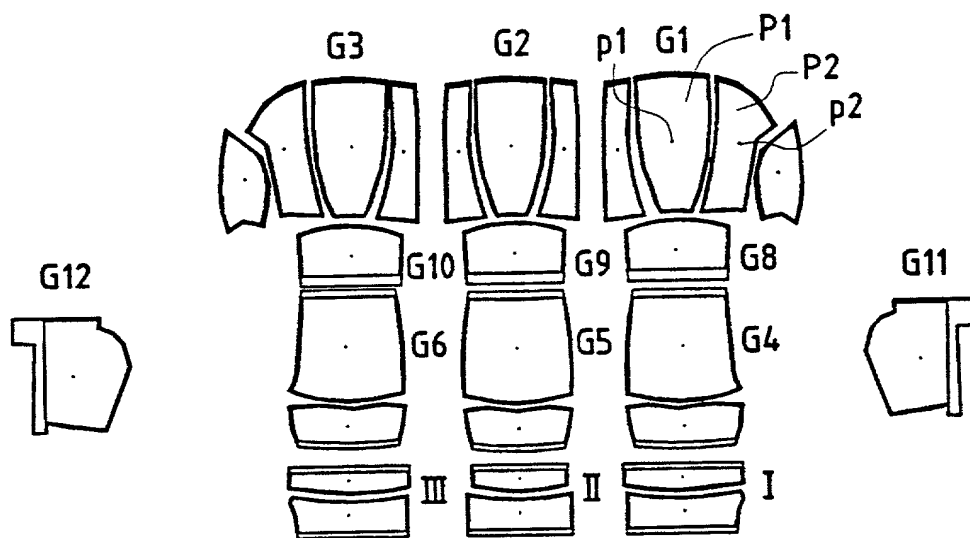


FIG. 4

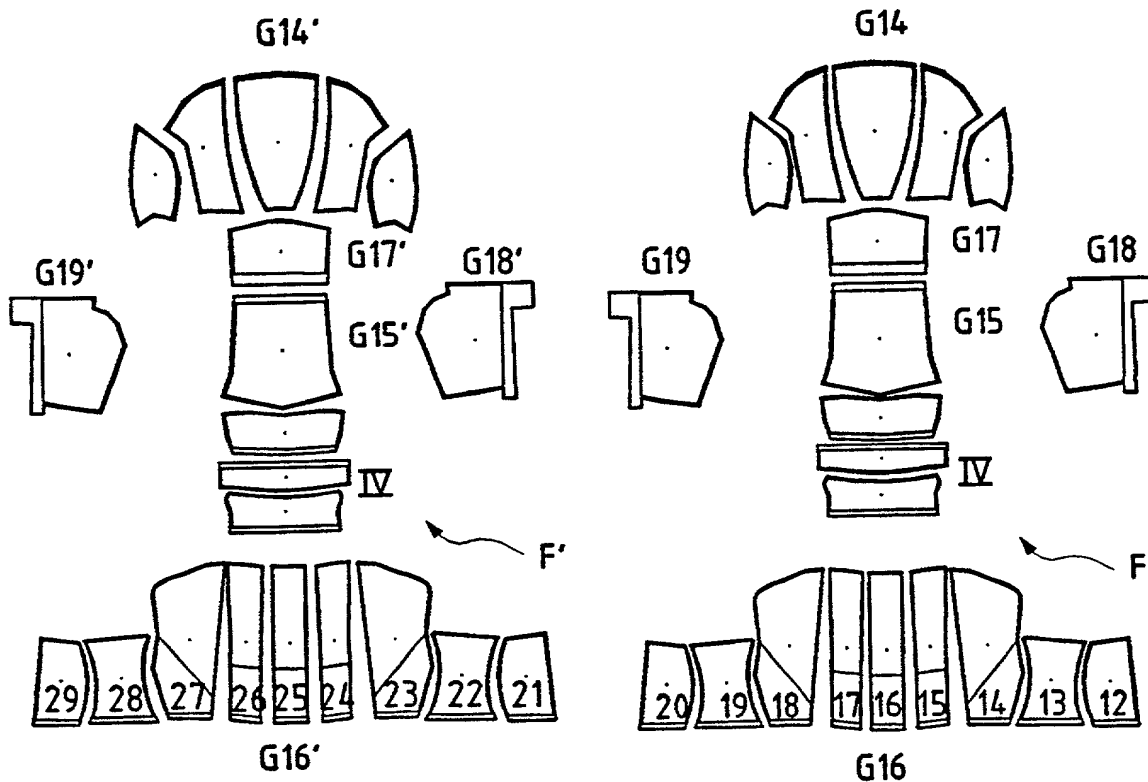
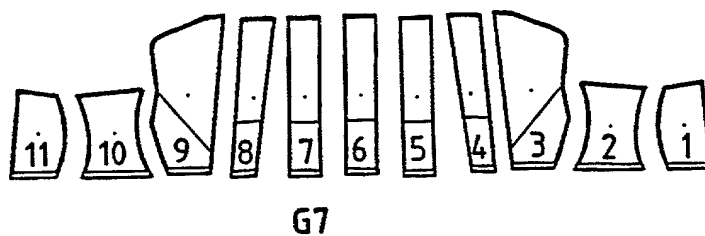


FIG. 5

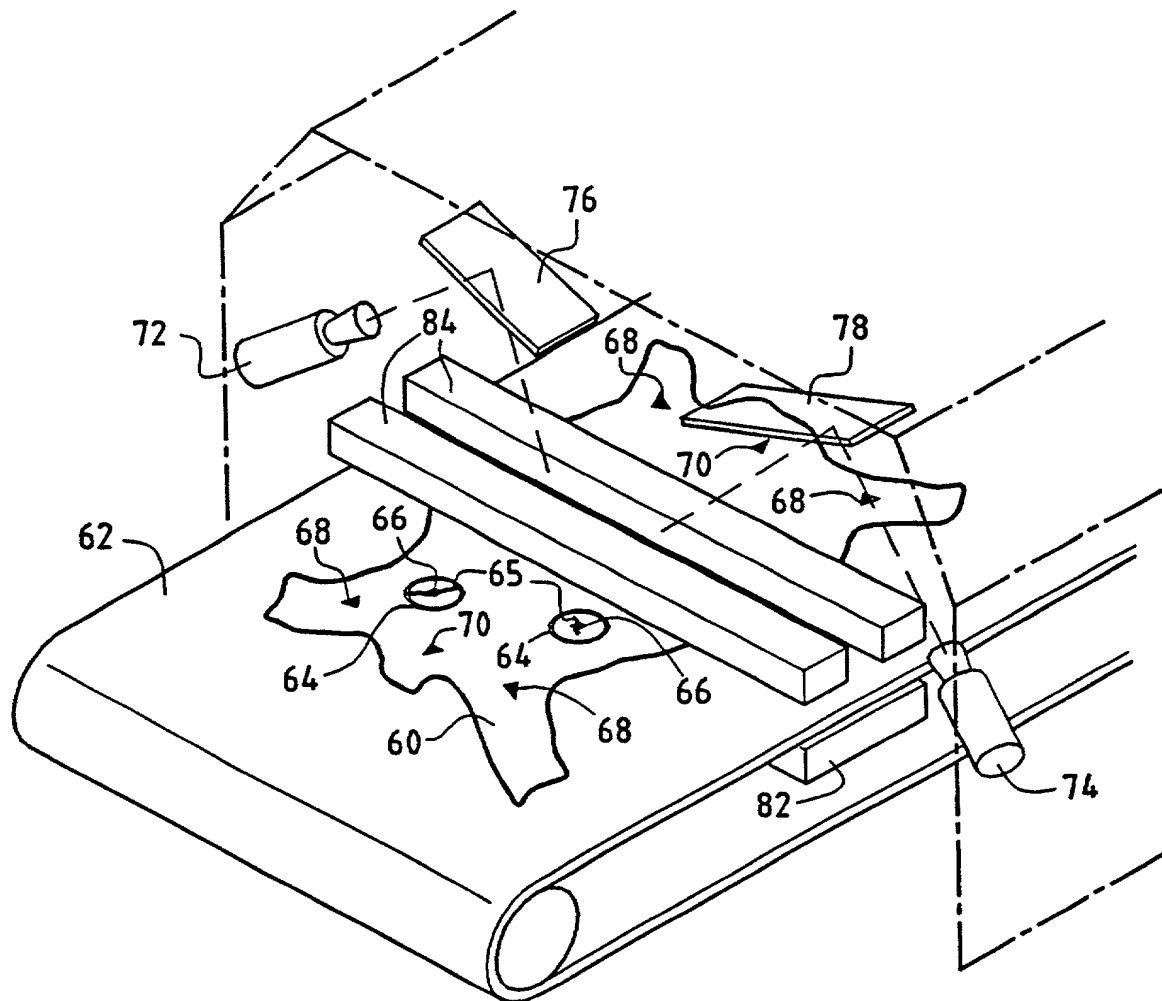


FIG. 6

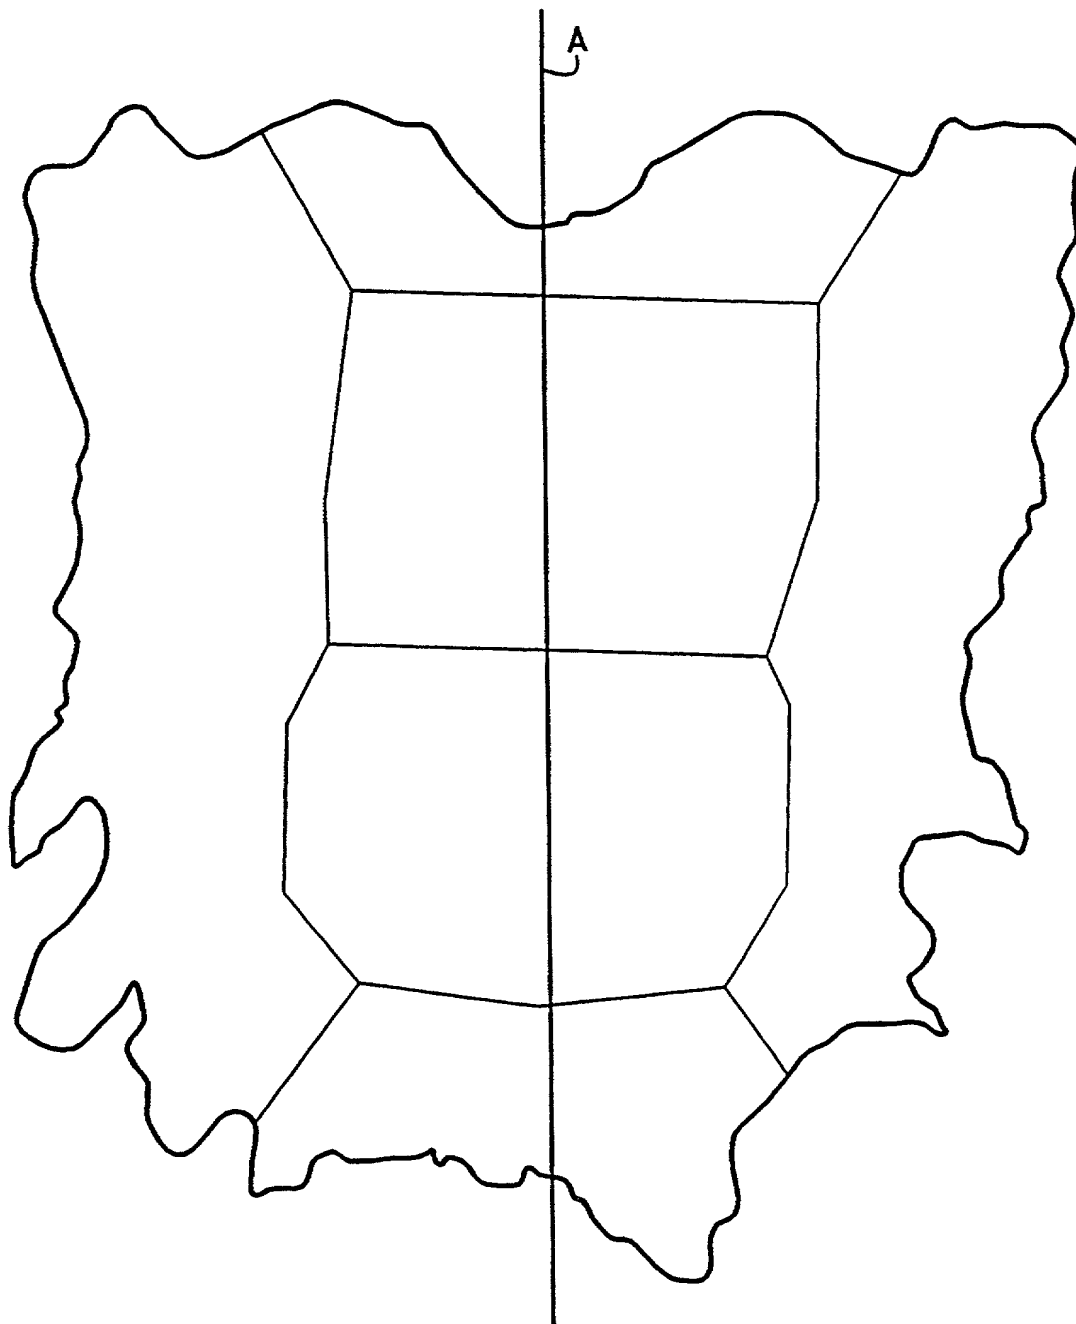
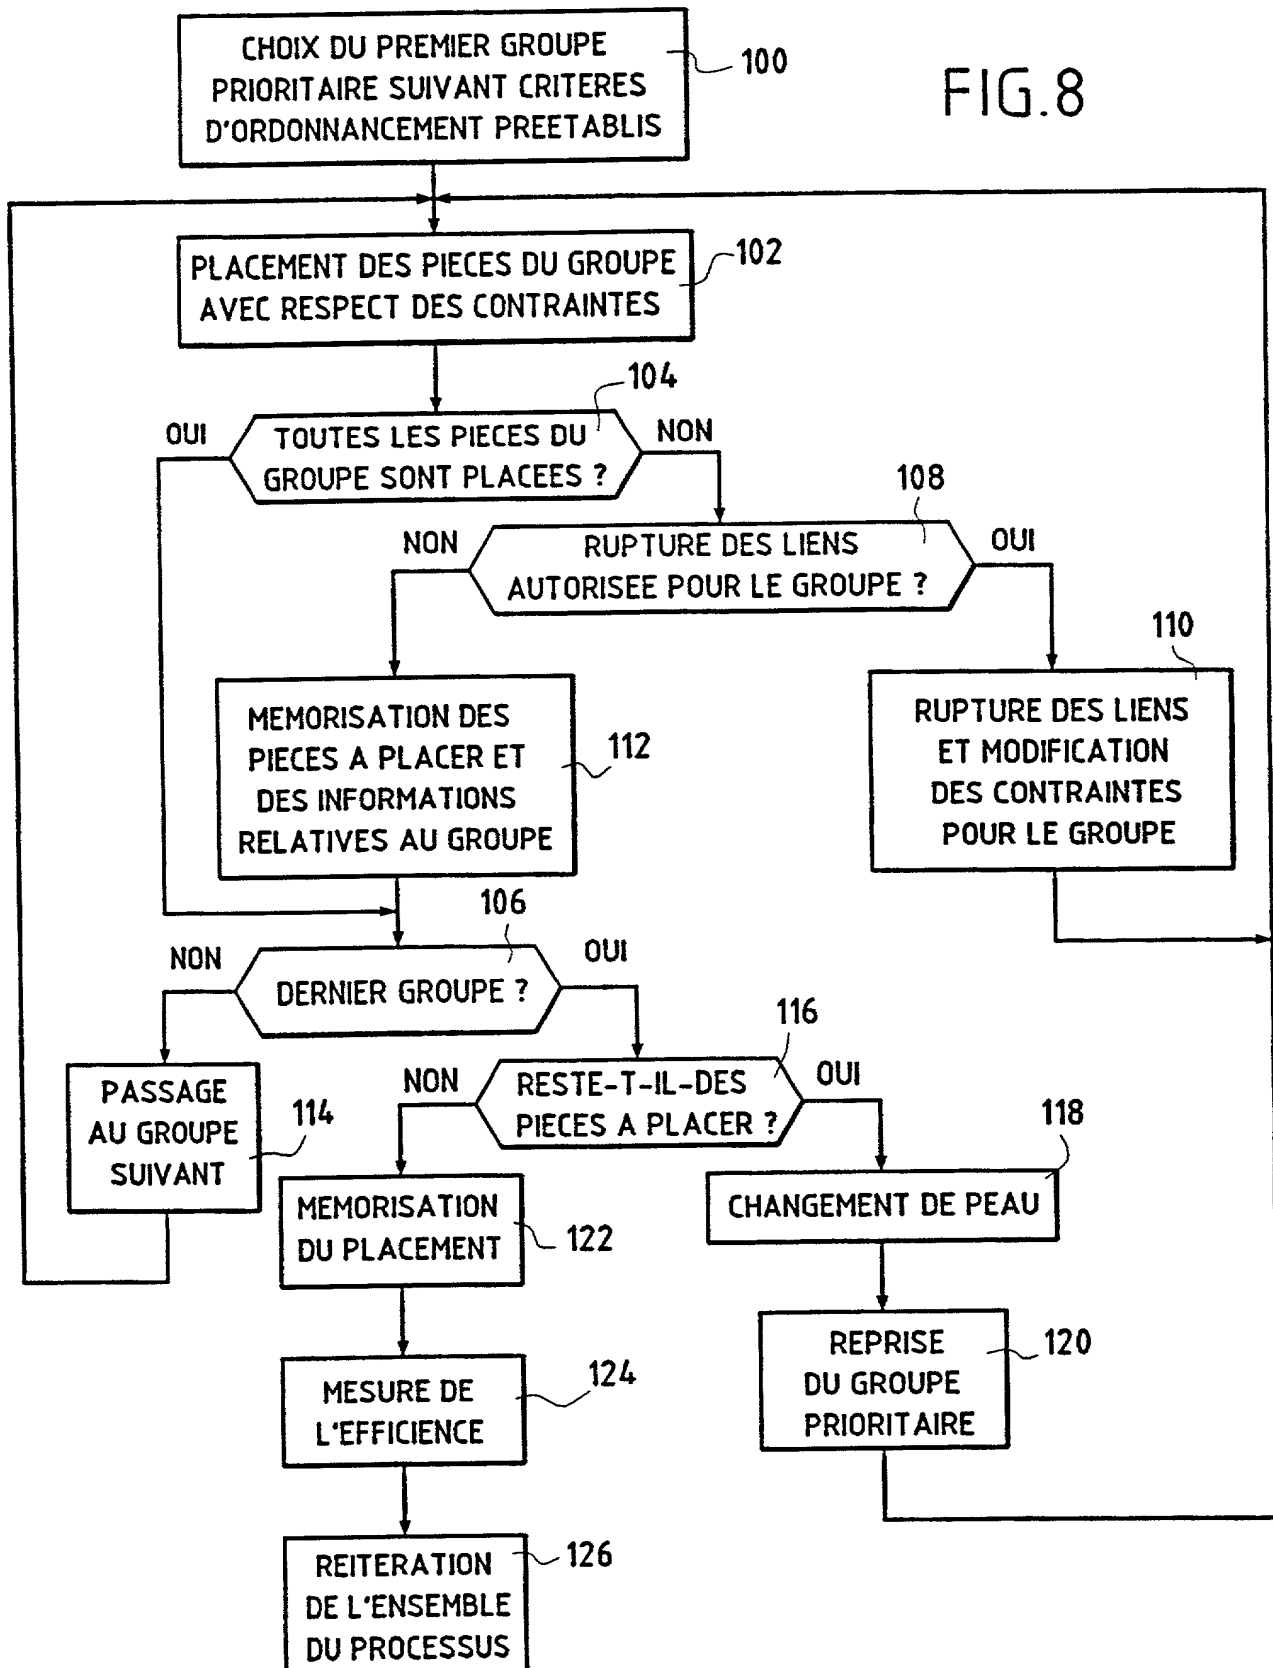


FIG. 7

FIG.8



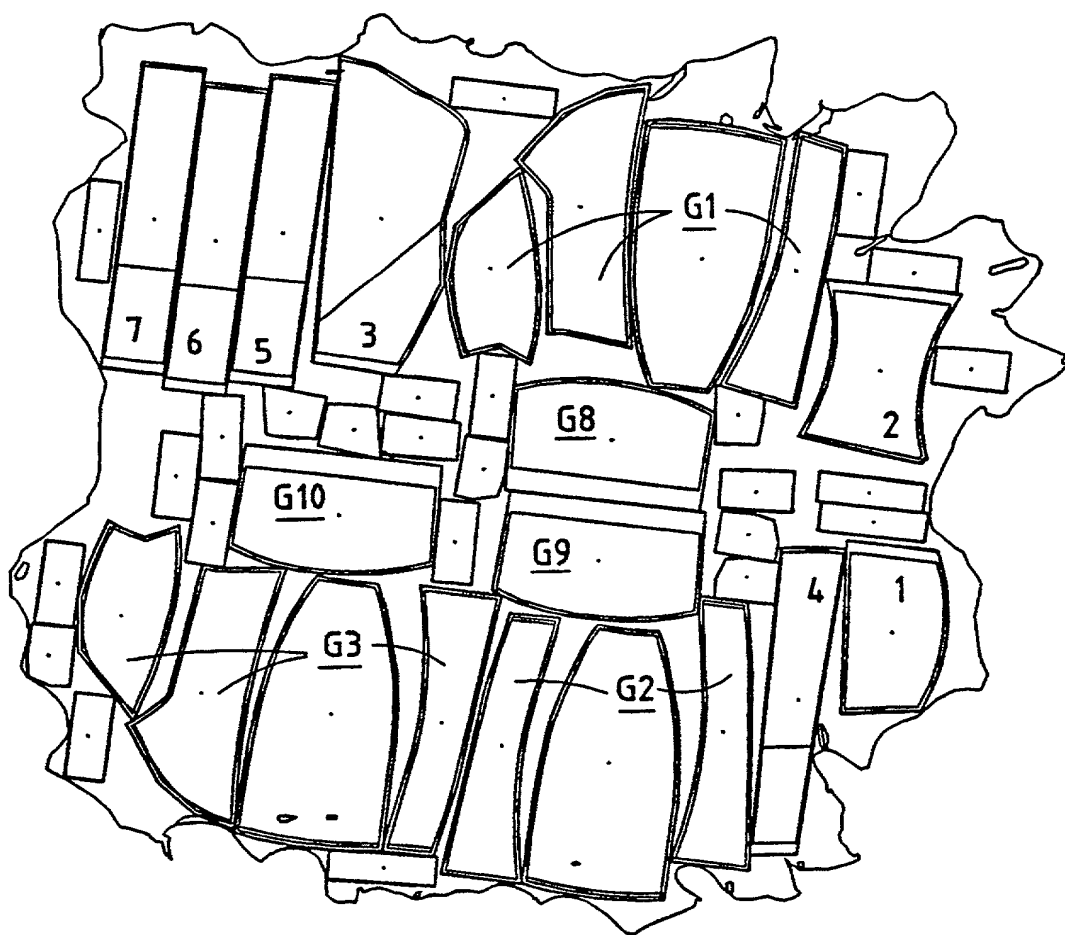


FIG.9

9/11

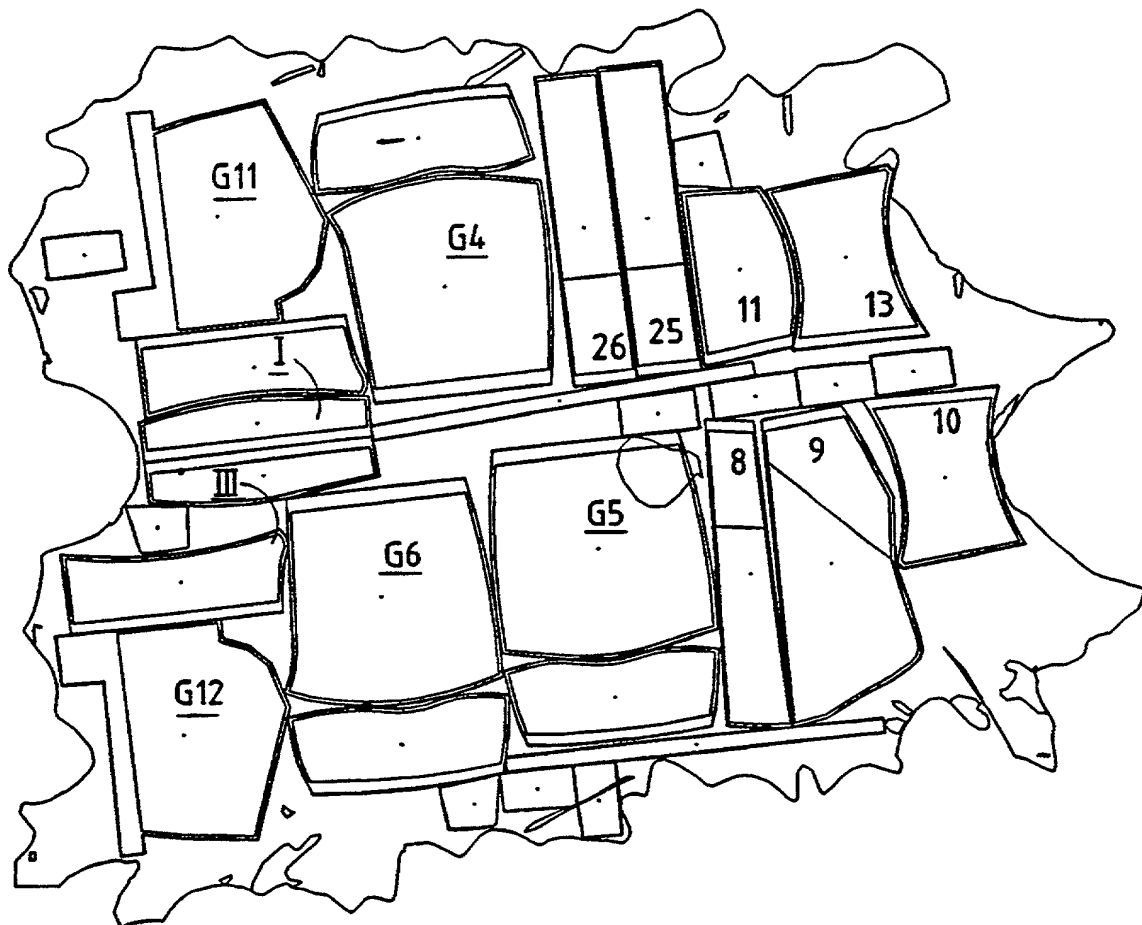


FIG.10

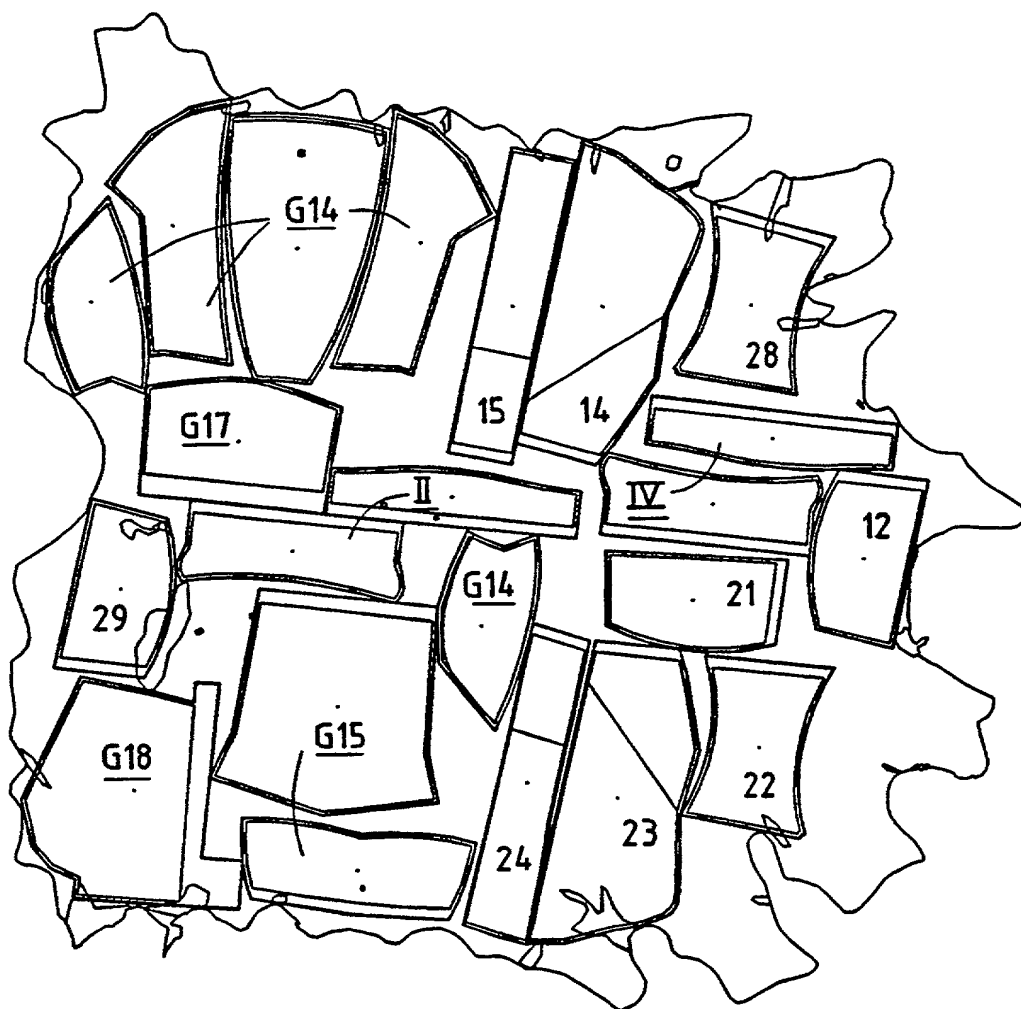


FIG. 11

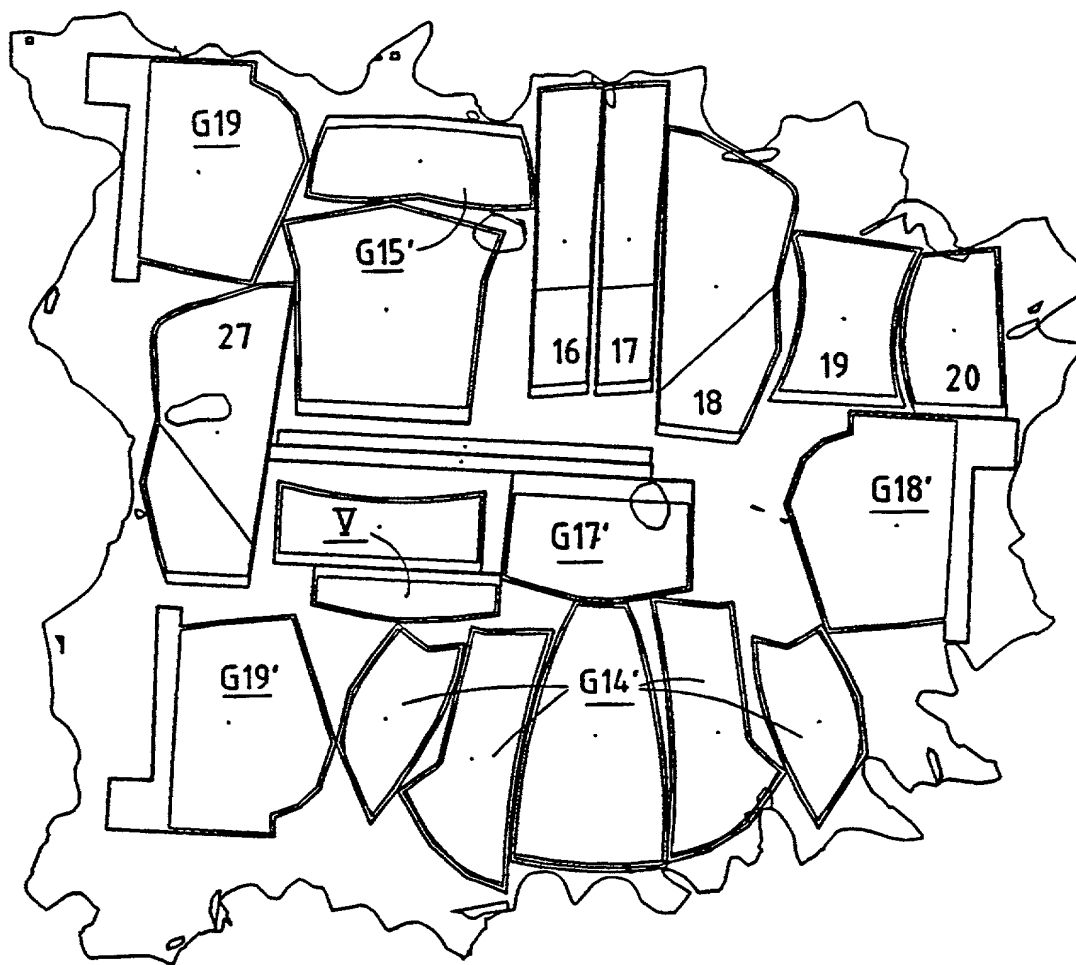


FIG.12

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD FOR AUTOMATICALLY PLACING PARTS ON LEATHER PIECES WITH NON-HOMOGENEOUS

CHARACTERISTICS

the specification of which (check only one item below):

☐ is attached hereto.

☐ was filed as United States application

Serial No. _____

on _____,

and was amended

on _____ (if applicable).

☒ was filed as PCT international application

Number PCT/FR99/02781

on 12 NOVEMBER 1999,

and was amended under PCT Article 19

on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:

COUNTRY (if PCT, indicate "PCT")	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 USC 119
FRANCE	98 14255	13 NOVEMBER 1998	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO

Combined Declaration For Patent Application and Power of Attorney (Continued)

(Include's Reference to PCT International Applications)

ATTORNEY'S DOCKET NUMBER
12911-1180

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120:

U.S. APPLICATIONS			STATUS (Check one)		
U S APPLICATION NUMBER	U S FILING DATE		PATENTED	PENDING	ABANDONED
PCT APPLICATIONS DESIGNATING THE U.S					
PCT APPLICATION NO	PCT FILING DATE	U S SERIAL NUMBERS ASSIGNED (if any)			

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (List name and registration number)

SEE OVERLEAF

Send Correspondence to:

JONES & ASKEW, LLP
2400 MONARCH TOWER, 3424 PEACHTREE ROAD, N.E.
ATLANTA, GA 30326

Direct Telephone Calls to:
(name and telephone number)

Dale LISCHER

(404) 949 2400

201	FULL NAME OF INVENTOR	FAMILY NAME <u>CHABIRAND GARÇONNET</u>	FIRST GIVEN NAME <u>Didier</u>	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY <u>33610 CESTAS</u>	STATE OR FOREIGN COUNTRY <u>FRANCE</u> FRX	COUNTRY OF CITIZENSHIP <u>FRANCE</u>
	POST OFFICE ADDRESS	POST OFFICE ADDRESS <u>117 AVENUE DU MARECHAL DE LATTRE DE TASSIGNY - 33610 CESTAS</u>		STATE & ZIP CODE/COUNTRY <u>FRANCE</u>
202	FULL NAME OF INVENTOR	FAMILY NAME <u>VALLORTIGARA</u>	FIRST GIVEN NAME <u>Alain</u>	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY <u>33510 ANDERNOS</u>	STATE OR FOREIGN COUNTRY <u>FRANCE</u> FRX	COUNTRY OF CITIZENSHIP <u>FRANCE</u>
	POST OFFICE ADDRESS	POST OFFICE ADDRESS <u>24 RUE FRANCOIS GOUBET</u>		STATE & ZIP CODE/COUNTRY <u>FRANCE</u>
203	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

SIGNATURE OF INVENTOR 201

SIGNATURE OF INVENTOR 202

SIGNATURE OF INVENTOR 203

DATE

JUNE 30, 2000

DATE

JUNE 30, 2000

DATE

09/600337

534 Rec'd PCT/PTC 13 JUL 2000

39

POWER OF ATTORNEY: The following attorneys are hereby appointed to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: Anthony B. Askew - 24,154; Roger T. Frost - 22,176; Jeffrey E. Young - 28,490; Robert E. Richards - 29,105; John R. Harris - 30,388; Stephen M. Schaezel - 31,418; Larry A. Roberts - 31,871; Gregory T. Gronholm - 32,415; Dale Lischer - 28,438; Peter G. Pappas - 33,205; James Dean Johnson - 31,771; W. Scott Petty - 35,645; Daniel J. Warren - 34,272; Leona G. Young - 37,266; Jamie L. Greene - 32,467; Holmes J. Hawkins III - 38,913; Mary Anthony Merchant - 39,771; Michael J. Mehrman - 40,086; William L. Warren - 36,714; Brenda Ozaki Holmes - 40,339; James D. Withers - 40,376; Kimberly J. Prior - 41,483; Theodore M. Green - 41,801; Christopher J. Leonard - 41,940; Christos S. Kyriakou - 42,776; John K. McDonald - 42,860; Michael S. Pavento - 42,985; Suzanne Seavello Shope - 37,933; M. Scott Boone - 42,341; Sima Singadia Kulkarni - 43,732; A. Shane Nichols - 43,836; Christopher J. Chan - 44,070; Collen A. Beard - 38,824; Steven P. Wigmore - 40,447; John M. Briski - P44,562; Lisa C. Elsevier - P44,669; S. Craig Hemenway - P44,759; Leonard J. Hope - P44,774; Paul E. Knowlton - P44,842.

Send correspondence to: JONES & ASKEW, LLP
2400 Monarch Tower, 3424 Peachtree Road, N.E.
Atlanta, GA 30326

Direct telephone calls (404) 949-2400 to:

Dale Lischer

09/600337